

ALTAIR V4

ROTARY PISTON METER

DIEHL
Metering



APPLICATION

ALTAIR V4 represents the new generation of volumetric meters developed within the framework of the MID (Measuring Instruments Directive), OIML R49, EN 14154, ISO 4064 and field requirements. ALTAIR V4 is a particularly compact and robust meter, adapting to the most restrictive environments and compatible with varying water qualities. ALTAIR V4 is modular and may be fitted at any time with an IZAR Radio, an IZAR DOSING device, or an IZAR PULSE emitter, gateway to other systems.

FEATURES

- ▶ High dynamic range
- ▶ Starting flowrate at 0.4 l/h
- ▶ Installation in any position
- ▶ Compact
- ▶ MID approved with R up to 800
- ▶ Composite & brass version
- ▶ Register with modularity "Ti" as standard
- ▶ Glass/metal register in option
- ▶ DN 15 & 20 mm

ALTAIR V4

ROTARY PISTON METER

TECHNICAL DATA

Nominal diameter	DN	mm	15	15	15	15	15	20	20	20
Overall length ¹	L	mm	110	115	134	165	170	110	165	190
Housing			brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass	brass	brass/ composite
Permanent flow rate	Q ₃	m ³ /h	2.5	2.5	2.5	2.5	2.5	4	4	4
Dynamic range (Q ₃ /Q ₁)	R		160	160	160	160	160	160	160	160
Starting flow rate		l/h	0.4	0.4	0.4	0.4	0.4	0.7	0,7	0,7
Minimum flow rate ¹	Q ₁	l/h	15.62	15.62	15.62	15.62	15.62	25	25	25
Transitional flow rate ¹	Q ₂	l/h	25	25	25	25	25	40	40	40
Overload flow rate	Q ₄	m ³ /h	3.125	3.125	3.125	3.125	3.125	5	5	5

¹ other values on request


APPROVAL

ALTAIR V4	
MID	LNE - 6250 (DN 15 & 20)
Potable water	ACS - WRAS - KTW / W270 - BELGAQUA

TEMPERATURE & PRESSURE

ALTAIR V4	
Medium temperature range	°C 0.1 ... +50
Nominal pressure	PN bar 16

DIMENSIONS

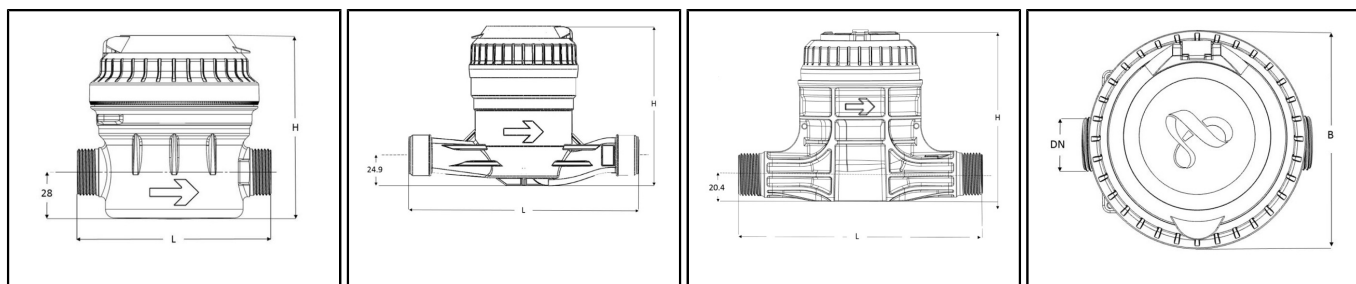

DN 15 - composite

DN 20 - brass

DN 20 - composite

Top view


Nominal diameter	DN	mm	15	15	15	15	15	20	20	20
Overall length ¹	L	mm	110	115	134	165	170	110	165	190
Housing			brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass/ composite	brass	brass	brass/ composite
Width	B	mm	92.7	92.7	92.7	92,7	92.7	90	90	90/97
Height	H	mm	104/108	105/117	105/109	105/108	105/108	132	132	132/135
Connection thread		Inch	G $\frac{3}{4}$ B	G $\frac{3}{4}$ B	G $\frac{3}{4}$ B	G $\frac{3}{4}$ B	G $\frac{3}{4}$ B	G1B	G1B	G1B
Weight		kg	0.90/0.51	0.95/0.51	1/0.55	1.05/0.58	1.07/0.58	1	1.2	1.34/0.72

¹ other body lengths on request


ALTAIR V4

ROTARY PISTON METER

PRECISION CURVE

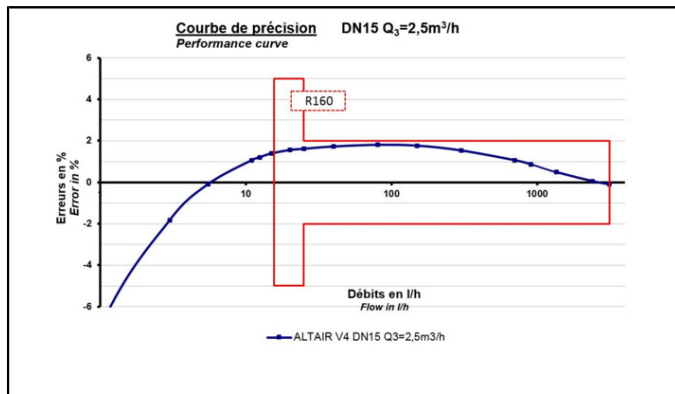

DN 15

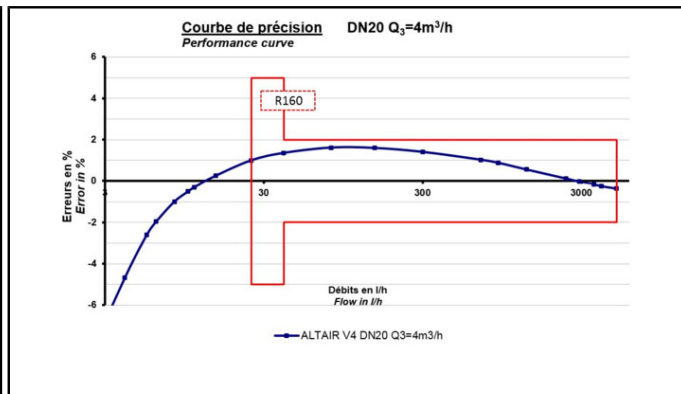

DN 20

PRESSURE LOSS (DELTA P=Q²/KVS²)

ALTAIR V4

Kvs 3.25 (DN 15) / 5.41 (DN 20 brass) / 5.30 (DN 20 composite)

This technology doesn't require straight length